
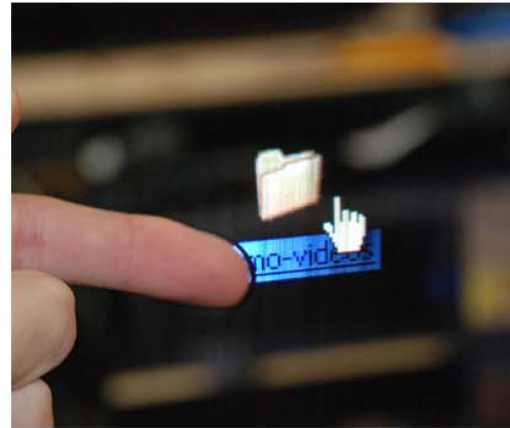


heliodisplay M30

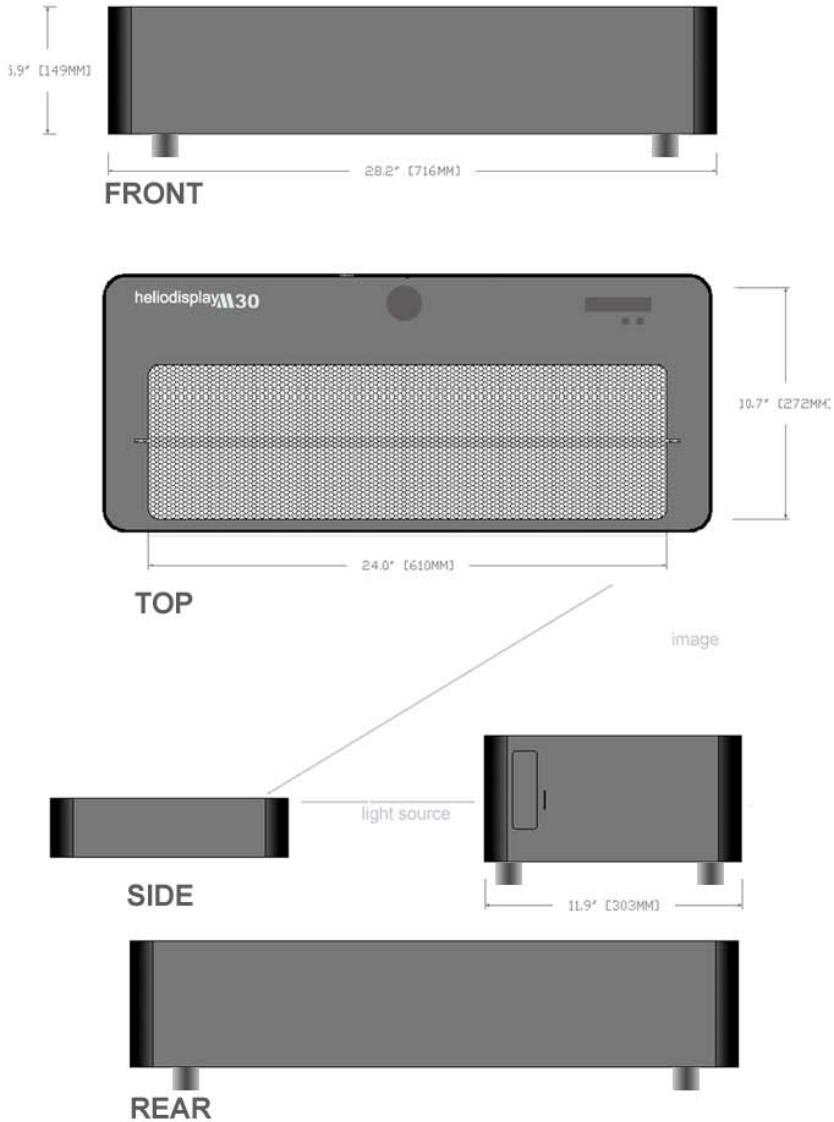

(above)heliodisplay integrated into slot in a coffee table

Heliodisplays are free-space displays capable of reproducing full color video and images into mid air. No surface is necessary. Various models are available ranging in size from a 30" diagonal, to a 100" image, in standard 4:3 aspect ratio (as on a standard TV). Similarly, they plug into a computer or DVD player using a standard computer, or video cable and similar power plug.

The heliodisplay module is designed to be integrated so that images are visible and the hardware is out of sight. Images are visible hanging in space.

The resolution of the displays come in XGA (1024 x 768) as standard all in a 6" tall small box around the size of a slim desktop computer.

Image Size	Maximum 30" measured diagonally (4:3 aspect)	
Interactivity (M30)	Virtual Touchscreen control: HelioCast M30	
Aspect Ratio	4:3 or 16:9	
Resolution	Native: SVGA 1024x768	
Contrast Ratio	2000:1 (1800 LUMENS AT SOURCE)	
Color Reproduction	16.7 Million colors/full frame video	
Video Input connectors	RGB analog, USB, RCA video, S-VIDEO, VGA	
Input signal frequency	Fh: 31-80KHz Fv: 56-120Hz	
Video & PC Compatibility	PC, Mac, NTSC, PAL, SECAM HD TV: 480i/480p, 720p, 1080i	
Image Translucency	Controllable visibility	
Operational Sound Level	~38-40 dB	
Electric Power Voltage	95-115 and 220-240V VAC	
Electric Power Frequency	47-63 Hz	
Electric Power Consumption	280W (250W from lamp)	
Working Temperature Range	55F (12C) to 95F (35C)	
Working Humidity Range	25% - 95%	
Weight (Base Unit)	~11.5lbs/ 7.1 kg (base unit)	
Dimensions	(W): 28.2" (D): 11.9" [29.8" expanded] (H): 5.9"	
Shipping Dimensions:	31" x 16" x 11.8" (78.8 cm x 40 cm x 30 cm)	
Shipping Weight:	28 lbs / 12.7 kg	
Warranty	one year limited parts and labor	
Included Items:	Heliodisplay Base unit, Projector or Projection module, User's Manual, User CD, Remote Control, Warranty Card, Quick Start Guide, Video Cable, S-video Cable, VGA Cable; (HelioCast M30 software & USB Cable with the M30)	